

ETSI TS 101 107 V8.0.1 (2001-06)

Technical Specification

**Digital cellular telecommunications system (Phase 2+);
Fraud Information Gathering System (FIGS);
Service description - Stage 1
(GSM 02.31 version 8.0.1 Release 1999)**



GSM®
GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

ETSI 

Reference

RTS/SMG-100231Q8

Keywords

Digital cellular telecommunications system,
Global System for Mobile communications
(GSM), Security

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword	4
1 Scope	5
2 References.....	5
3 Definitions and abbreviations	5
3.1 Definitions	5
3.2 Abbreviations.....	6
4 Fraud Information Gathering System high level requirements	6
4.1 Description.....	6
4.2 Applicability	6
4.3 Normal Procedure.....	6
5 Service conditions	7
5.1 Control of monitoring of subscriber activities	7
5.2 Number of calls monitored by a VPLMN	7
5.3 Interworking with non-supporting networks	7
5.4 Information Delivery Time	8
6 Monitored activity.....	8
7 Interface between HPLMN and FDS	8
8 Security Requirements between HPLMN and VPLMN.....	8
Annex A (normative): Information transferred by the VPLMN.....	9
Annex B (normative): Message flow in FIGS monitoring, normal procedure.....	11
Annex C (informative): Status of GSM 02.31	12
History.....	13

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Special Mobile Group (SMG).

The present document defines Fraud Information Gathering System (FIGS) Service description (Stage 1) within the digital cellular telecommunications system.

The contents of the present document may be subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will then be re-submitted for formal approval procedures by ETSI with an identifying change of release date and an increase in version number as follows:

Version 8.x.y

where:

- 8 GSM Phase 2+ Release 1999
- x the second digit is incremented for changes of substance, i.e. technical enhancements, corrections, updates, etc.;
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

1 Scope

The present document specifies the stage 1 description of the Fraud Information Gathering System (FIGS) feature which provides the means for the HPLMN to monitor the activities of its subscribers in a VPLMN.

The purpose of this network feature is to enable the HPLMN to monitor the activities of its subscribers while they are roaming. The VPLMN collects information about a defined set of activities on monitored subscribers and sends this information back to the HPLMN. This enables the HPLMN to clear certain types of calls and so stop fraudulent use of the GSM system.

The present document enables service providers/ network operators to use FIGS, and service limitation controls such as Operator Determined Barring (ODB) and Immediate Service Termination (IST), to limit their financial exposure to subscribers producing large unpaid bills.

HPLMNs may also choose to monitor the activities of its subscribers within the HPLMN.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- For this Release 1999 document, references to GSM documents are for Release 1999 versions (version 8.x.y).

[1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".

[2] GSM 02.33: "Digital cellular telecommunications system (Phase 2+); Lawful Interception - stage 1

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

A subscriber: calling mobile subscriber.

B subscriber: mobile subscriber originally called by the A subscriber

C subscriber: subscriber to whom the B subscriber has requested that calls be forwarded. The C subscriber may be fixed or mobile

call: both connection-oriented and connectionless services/events

call information: information about a call

call reference: reference number for a call that shall remain constant throughout the duration of that call and that shall be unique to that call and the switch on which the call was made for a period of at least one week

home network: home PLMN including non-GSM elements such as the Fraud Detection System (FDS), customer service systems and billing

monitored activities: subscriber activities that shall be reported to the HPLMN. These can be call related events (e.g. call-set-up, call termination) or the invocation of call related and call independent supplementary services (e.g. Call Hold, Call Waiting, Call Transfer, Call Forwarding, Unstructured Supplementary Service Data)

3.2 Abbreviations

Abbreviations used in the present document are also listed in GSM 01.04 and the following apply:

CGI	Cell Global Identifier
FDS	Fraud Detection System
FIGS	Fraud Information Gathering System
IST	Immediate Service Termination
MO	Mobile Originated
MT	Mobile Terminated

4 Fraud Information Gathering System high level requirements

4.1 Description

It shall be possible for the HPLMN to request the VPLMN to supply certain information about a subscriber from the time the subscriber registers in that VPLMN to the time the last of the monitored activities is finished in that VPLMN, which can be after the subscriber's de-registration from the VPLMN. The information received by the HPLMN shall be passed to the relevant network or service providers and used to instruct the VPLMN to act in an appropriate way.

Fraud information gathering is controlled by the HPLMN and can be activated and deactivated by the HPLMN only.

The information is received in the HPLMN and is forwarded to fraud detection and control systems. Such systems are out of the scope of this standard.

The subscriber is specified by the IMSI or MSISDN.

4.2 Applicability

This network feature applies to all subscribed Bearer Services and Teleservices and supplementary services of the subscriber. It is not possible to apply FIGS independently to individual Services.

The HPLMN shall be able to specify whether it would like call information on MO calls, MT calls, or both.

4.3 Normal Procedure

The HPLMN shall be able to request a VPLMN to monitor a subscriber.

See annex A for the definition of the information to be sent for each call event.

If the VPLMN cannot monitor the subscriber, it shall indicate this as a response to the FIGS request.

The FDS will process this information and may then limit the activities of the subscriber using ODB or terminate the subscriber activities using IST, or may allow the subscriber to proceed.

When the home network no longer wishes the subscriber to be monitored by the VPLMN it requests the VPLMN to stop monitoring the activities of the subscriber.

Figure 1 shows the sequence of FIGS messages passed during a normal case.

5 Service conditions

5.1 Control of monitoring of subscriber activities

The HPLMN can request a VPLMN to begin monitoring the activities of a subscriber when the subscriber has registers on that VPLMN or at any time after registration. If the VPLMN is able to monitor a subscriber as requested it shall send a confirmation of monitoring message to the HPLMN.

The HPLMN does not need to know the status of the target subscriber before initiation or subsequent termination of fraud information gathering.

Fraud information cannot be switched on or off by the subscriber or other (unauthorised) party.

Subscribers upon which fraud information gathering has been set shall not be able by interrogating the network to determine that they are subject to fraud information gathering.

Subscribers upon which fraud information gathering has been set shall not be able, for example by significant changes to normal call set up times, speech quality or general transmission characteristics, to determine that they are subject to fraud information gathering.

If the VPLMN receives a request to monitor the activities of a subscriber and an activity to be monitored is already ongoing it is not necessary for the VPLMN to send information on this particular activity to the HPLMN.

If the VPLMN receives a request to cease monitoring the activities of a subscriber and an activity is already ongoing and being monitored, the VPLMN shall immediately cease sending information on this activity to the HPLMN.

5.2 Number of calls monitored by a VPLMN

If the VPLMN has to monitor the activities of a large number of subscribers for FIGS this may degrade the performance of the VPLMN. Each VPLMN (in reality, each network entity involved in FIGS monitoring) will therefore have a maximum number of subscribers that it can monitor.

If the number of monitored subscribers has reached this upper limit the VPLMN shall reject requests for monitoring of subscribers from HPLMNs until the number of monitored subscribers decreases below the limit.

Each VPLMN may have a limit per HPLMN on the number of subscribers from that HPLMN that it will monitor. When an HPLMN has requested a VPLMN to monitor a number of subscribers equal to the limit for that HPLMN, the VPLMN can refuse any subsequent requests for FIGS monitoring from that PLMN, until the number of monitored subscribers drops below the limit. The principles behind the setting of these limits are outside the scope of the present document.

In order to minimise the number of subscribers that a VPLMN has to monitor, the HPLMN should ideally limit itself to requesting information about subscriber's monitored activities in:

- the current VPLMN;
- the last previously served VPLMN.

5.3 Interworking with non-supporting networks

If the HPLMN does not receive a positive acknowledgement to the request for FIGS monitoring sent to a VPLMN, it shall assume that the VPLMN does not support FIGS. The HPLMN may then act as appropriate (e.g. put appropriate ODB categories in place).

5.4 Information Delivery Time

The need for up to date information is a critical part of any fraud information system. The sooner data is transferred to the HPLMN, the sooner fraud can be stopped. Therefore the prescribed information shall be transferred from the VPLMN network to the HPLMN within two minutes of the occurrence of a FIGS-monitored event, if real time implementations of FIGS are used.

The information should be transferred from the VPLMN to the HPLMN over appropriate communication links.

6 Monitored activity

The authorised party can request the VPLMN to monitor both call activity and supplementary services.

The monitoring of call activity shall take the form of transmission of call information from the VPLMN to the HPLMN, at the start and end of all calls. For long calls, the VPLMN shall also send partial call information a certain time (e.g. 15 minutes) after the call has begun.

Call information shall be sent to the HPLMN by the VPLMN on the invocation of all supplementary services, e.g.:

- call deflection;
- call forwarding;
- call hold;
- Multi Party (MPTY);
- Explicit Call Transfer (ECT).

The HPLMN can decide to prevent future invocation of the same or all supplementary services using ODB. The decision mechanism is out of the scope of the present document.

7 Interface between HPLMN and FDS

Information gathered by the HPLMN may be transferred to Non-GSM systems, e.g. an FDS. These systems will decide if the monitored activity is fraudulent and will advise the home network to take appropriate action, e.g. send an IST command to the VPLMN, change the subscriber's ODB categories.

The contents of call information messages to be transferred on this interface shall be specified but not the transfer mechanism. This is in line with the approach used for the X-interface as specified in GSM 02.33. The message formats are defined in annex A.

The system needs the ability to handle the volume of information returned to the home network.

8 Security Requirements between HPLMN and VPLMN

It is expected that there will be a need for authentication, data integrity and confidentiality of the communication made between PLMNs.

These issues are for study under other work items within the SMG 10 work programme.

Annex A (normative): Information transferred by the VPLMN

The reports generated by the VPLMN shall take the form of "call information" records for each monitored subscriber. The content of the call information will depend on the type of event (call start, end etc.). To simplify matters, there will be one format for both MO and MT calls with an MO/MT indicator within the call information to distinguish between the two.

A partial call information will be sent to the HPLMN when there is an mid-call invocation of a supplementary service and when a call in progress has exceeded a defined duration.

Justification is given for the content of the call information message.

Table A.1: Call information content

Information
Dialled digits
A subscriber
B subscriber
C subscriber
CGI
IMSI
IMEI
Call Start Time/Date
Call Duration
Call Reference
MO/MT indicator
Visited MSC address
Type of SS event
Type of Basic Service

The **Dialled digits** are required as these are an important indicator in deciding if a call is fraudulent or not - certain call destinations are more likely to be called fraudulently than others.

A subscriber can be used to identify the subscriber

B, C subscriber are relevant as some call destinations are more subject to fraud than others.

Cell Global Identifier (**CGI**) is relevant as some cells in a PLMN are more subject to fraud than others.

The **IMSI** is used to reference the subscriber.

The **IMEI** can be used to check if a stolen handset has been used.

The **Call Start Time/Date** is required so that the call duration can be calculated (if the call end time and not call duration is given at call conclusion) and because the call start time can also an important indicator of fraudulency.

The **Call Duration** gives the duration of the call at the sending of the partial call information - call duration can be an important indicator of fraudulency. If call end is sent instead, the duration can be calculated using the call start and end times.

The **Call Reference** is used to reference a particular call.

The **MO/MT indicator** is required because call charging is different for MO and MT calls.

The **Visited MSC address** gives the PLMN on which the call was made.

The **Type of SS event** record is sent if the "call" start is actually the invocation of a supplementary service, e.g. ECT. The Type of SS event is required as this can help to indicate if the mobile is being fraudulently used or not.

The **Type of Basic Service** indicates whether a teleservice or bearer service is being used and which sort of teleservice or bearer service is being used and is sent if the event is a call and not a supplementary service. The Type of Basic Service is required as this can help to indicate if the mobile station is being fraudulently used or not.

Annex B (normative): Message flow in FIGS monitoring, normal procedure

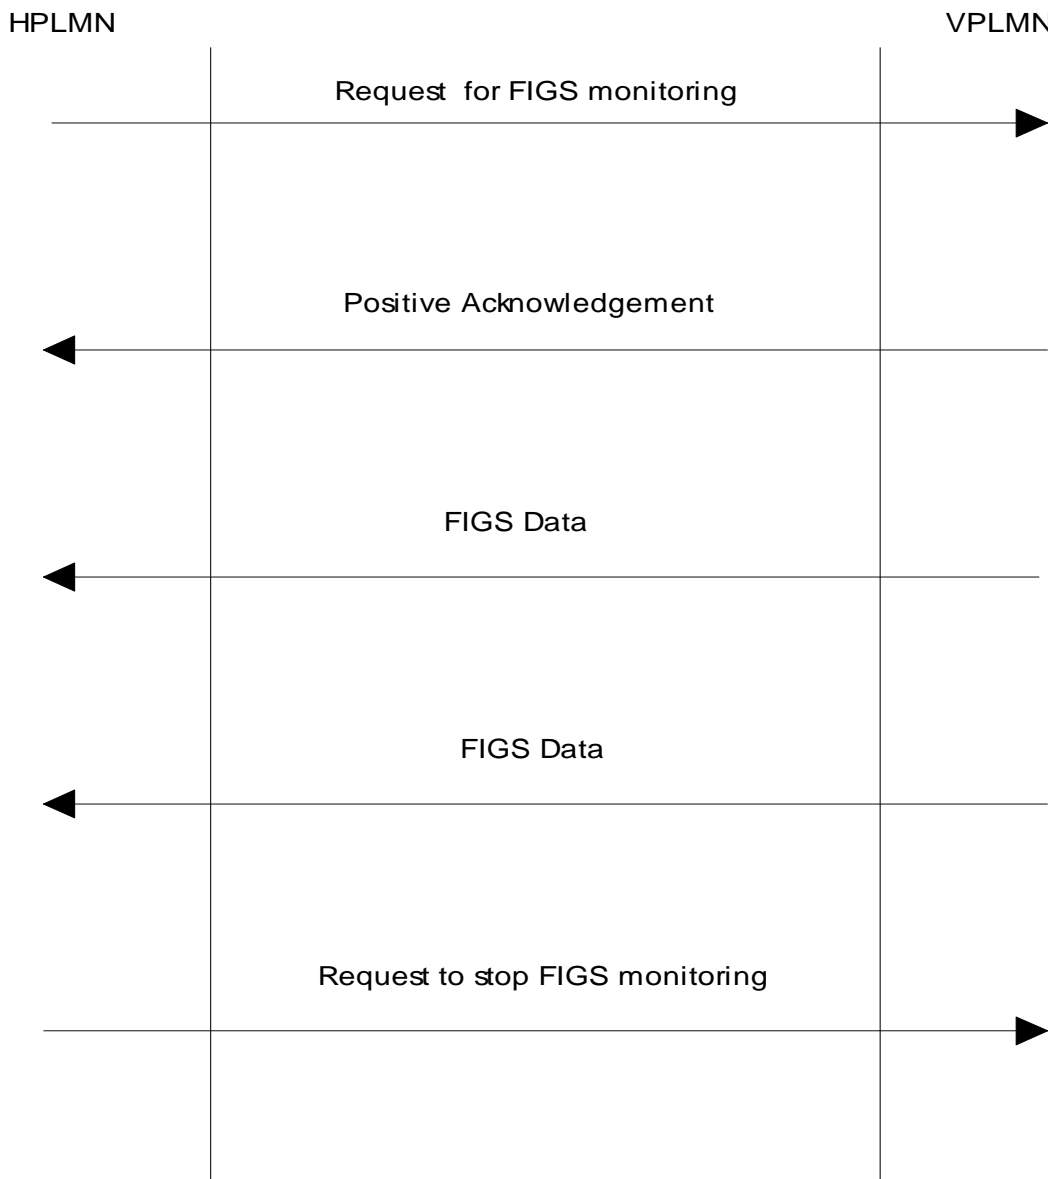


Figure B.1: Message flow in FIGS monitoring, normal procedure

Annex C (informative): Status of GSM 02.31

Status of Technical Specification GSM02.31; stage 1 of FIGS		
Date	Version	Remarks
		No Phase 1 version
June 1997	1.0.0	To SMG#22 for information
October 1997	2.0.0	To SMG#23 for approval
October 1997	5.0.0	TS approved by SMG#23
March 1998	7.0.0	The specification was converted to version 7.0.0 because the work item is related to Release 98; version 5.0.0 withdrawn. (SMG#25)
June 1998	7.1.0	CR 02.31-A001r1 (correction) approved by SMG#26
August 1999	7.1.1	Publication version
April 2000	8.0.0	Release 1999 publication version
June 2001	8.0.1	ETSI Publication

History

Document history		
V8.0.1	June 2001	Publication