

ETSI EN 300 935 V7.0.1 (2000-01)

European Standard (Telecommunications series)

**Digital cellular telecommunications system (Phase 2+);
Advice of Charge (AoC) supplementary services - Stage 2
(GSM 03.86 version 7.0.1 Release 1998)**



Reference

REN/SMG-030386Q7

Keywords

Digital cellular telecommunications system,
Global System for Mobile communications
(GSM)

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C

Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr

Individual copies of this ETSI deliverable

can be downloaded from

<http://www.etsi.org>

If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

| | |
|----------------------------------------------------------------------|-----------|
| Intellectual Property Rights..... | 4 |
| Foreword | 4 |
| 0 Scope | 5 |
| 0.1 References..... | 5 |
| 0.2 Abbreviations..... | 5 |
| 1 Advice of Charge (Information) (AoCI)..... | 5 |
| 1.1 Advice of Charge (Information) MSC SDL diagram..... | 5 |
| 1.2 Advice of Charge (Information) mobile equipment SDL diagram..... | 6 |
| 1.3 Advice of Charge (Information) information flow diagram..... | 6 |
| 1.4 Information stored in the HLR | 9 |
| 1.5 State transition model..... | 10 |
| 1.6 Transfer of Information from HLR to VLR..... | 10 |
| 1.7 Information stored in the VLR..... | 10 |
| 1.8 Handover..... | 10 |
| 2 Advice of Charge (Charging) (AoCC) | 11 |
| 2.1 Advice of Charge (Charging) MSC SDL diagram..... | 11 |
| 2.2 Advice of Charge (Charging) mobile equipment SDL diagram..... | 11 |
| 2.3 Advice of Charge (Charging) information flow diagram..... | 11 |
| 2.4 AoCC subscriber roaming requirements | 11 |
| 2.5 Information stored in the HLR | 16 |
| 2.6 State transition model..... | 16 |
| 2.7 Transfer of Information from HLR to VLR..... | 16 |
| 2.8 Information stored in the VLR..... | 16 |
| 2.9 Handover..... | 16 |
| Annex A (normative): Information stored in the MSC | 17 |
| Annex B (informative): Change Request History | 18 |
| History..... | 19 |

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by the Special Mobile Group (SMG).

The present document defines the stage 2 of the Advice of Charge (AoC) supplementary services within the digital cellular telecommunications system.

The contents of the present document is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will be re-released with an identifying change of release date and an increase in version number as follows:

Version 7.x.y

where:

- 7 indicates Release 1998 of GSM Phase 2+.
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

| National transposition dates | |
|----------------------------------------------------------------------------------------|-------------------|
| Date of adoption of this EN: | 31 December 1999 |
| Date of latest announcement of this EN (doa): | 31 March 2000 |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 30 September 2000 |
| Date of withdrawal of any conflicting National Standard (dow): | 30 September 2000 |

0 Scope

The present document gives the stage 2 description of the Advice of Charge (AoC) supplementary services.

The charging supplementary services currently defined are:

- Advice of Charge (Information) (AoCI) (clause 1);
- Advice of Charge (Charging) (AoCC) (clause 2).

0.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- For this Release 1998 document, references to GSM documents are for Release 1998 versions (version 7.x.y).

- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); "Abbreviations and acronyms".
- [2] GSM 02.24: "Digital cellular telecommunications system (Phase 2+); Description of Charge Advice Information (CAI)".
- [3] GSM 02.86: "Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) supplementary services - Stage 1".
- [4] GSM 03.11: "Digital cellular telecommunications system (Phase 2+); Technical realization of supplementary services".

0.2 Abbreviations

Abbreviations used in the present document are listed in GSM 01.04.

1 Advice of Charge (Information) (AoCI)

1.1 Advice of Charge (Information) MSC SDL diagram

The SDL diagram for the Advice of Charge (Information) supplementary service within the MSC is given in figure 1.1.

NOTE 1: AoC (Information) is not applicable to emergency calls.

NOTE 2: The request of generation of the Charge Advice Information (CAI) applies to AoC initiation or charge modification.

1.2 Advice of Charge (Information) mobile equipment SDL diagram

The SDL diagram for the Advice of Charge (Information) supplementary service within the mobile equipment is given in figure 1.2. This SDL indicates when charging calculations are started, amended and stopped, within the mobile equipment. The mobile equipment should start charging calculations as soon as possible after receiving the charging information. Charging calculations should be amended by the mobile equipment in accordance with GSM 02.24.

NOTE: The point at which the charging calculations are amended can occur before or after sending the AoC Acknowledge.

Charging calculations are stopped when the call ends for any reason.

The reception of the CAI shall be acknowledged only if the MS supports the AoCI functionality specified in GSM 02.24 and GSM 02.86, however the network does not action this acknowledgement in the AoC (Information) case.

1.3 Advice of Charge (Information) information flow diagram

The Advice of Charge (Information) information flow diagrams are shown in figure 1.3.

Title:

Creator: SDT Print version

CreationDate: 1994_03_08

Figure 1.1: SDL diagram of advice of charge (information) in the MSC

Title:

Creator: SDT Print version

CreationDate: 1994_03_08

Figure 1.2: SDL diagram of advice of charge (information) in the mobile equipment



Figure 1.3: Information flow for Advice of Charge (Information)

1.4 Information stored in the HLR

AoCI may have the following logical states (refer to GSM 03.11 for an explanation of the notation):

| Provisioning State | Registration State | Activation State | HLR Induction State |
|--------------------|--------------------|-----------------------|---------------------|
| (Not Provisioned, | Not Applicable, | Not Active, | Not Induced) |
| (Provisioned, | Not Applicable, | Active and Operative, | Not Induced) |

The HLR shall store the logical state of AoCI (which shall be one of the valid states listed above) on a per subscriber basis.

1.5 State transition model

The following figure shows the successful cases of transition between the applicable logic states of AoCI. The state changes are caused by actions of the service provider.

Note that error cases are not shown in the diagram as they normally do not cause a state change. Additionally, some successful requests may not cause a state change. Hence they are not shown in the diagram.

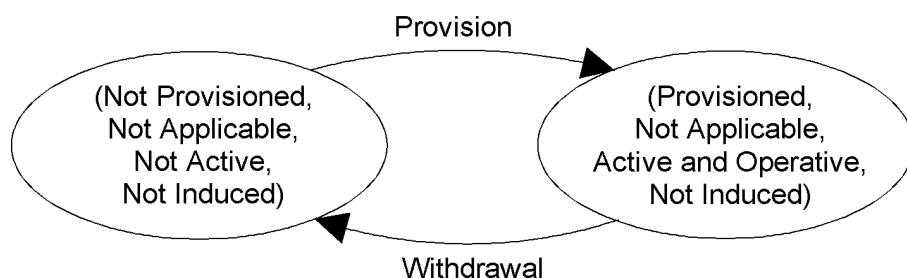


Figure 1.4: State transition model for AoCI

1.6 Transfer of Information from HLR to VLR

If the provisioning state for AoCI is "Provisioned" then when the served subscriber registers on a VLR the HLR shall send that VLR information about the logical state of AoCI.

If the logical state of AoCI is changed while a subscriber is registered on a VLR, then the HLR shall inform the VLR of the new logical state of AoCI.

1.7 Information stored in the VLR

For the supplementary service AoCI the VLR shall store the service state information received from the HLR.

1.8 Handover

Handover will have no impact on AoC control procedure.

2 Advice of Charge (Charging) (AoCC)

2.1 Advice of Charge (Charging) MSC SDL diagram

The SDL diagram for the Advice of Charge (Charging) supplementary service within the MSC is given in figure 2.1. At invocation of the Advice of Charge (Charging) supplementary service the network shall send the "Charging" MS the CAI. The network shall allow the call to proceed whilst waiting for an acknowledgement of the CAI. The waiting period is governed by Timer T(AoC). On expiry of T(AoC) the network shall initiate call clearing.

NOTE 1: AoC (Charging) is not applicable to emergency calls.

NOTE 2: The request of generation of CAI applies to AoC initiation or charge modification.

2.2 Advice of Charge (Charging) mobile equipment SDL diagram

The SDL diagram for the Advice of Charge (Charging) supplementary service within the mobile equipment is given in figure 2.2. The SDL indicates when charging calculations are started, amended and stopped, within the mobile equipment. The mobile equipment should start charging calculations as soon as possible after receiving the charging information. Charging calculations should be emended by the mobile equipment in accordance with GSM 02.24.

NOTE: The point at which charging calculations are amended can occur before or after sending the AoC Acknowledge.

Charging calculations are stopped when the call ends for any reason.

The reception of the CAI shall be acknowledged only if the MS supports the AoCC functionality specified in GSM 02.24 and GSM 02.86.

For mobile originated calls, the MS shall prevent a call set-up attempt if the ACM value is equal to or greater than ACMmax.

For mobile terminated calls, a call set-up attempt shall be allowed even if the ACM value is equal to or greater than ACMmax. In this case, when the MS detects that this is a chargeable call and that the ACM value is equal to or greater than ACMmax then the call shall be released.

During an active call, when the MS detects that ACM is equal to or greater than ACMmax then the MS shall release the call.

2.3 Advice of Charge (Charging) information flow diagram

The Advice of Charge (Charging) information flow diagrams are shown in figure 2.3.

2.4 AoCC subscriber roaming requirements

When an AoCC subscriber first roams into an MSC area not supporting AoCC, or the subscription is given to him while he is roaming in an MSC area not supporting AoCC the following applies:

The HLR shall indicate to the VLR that roaming is restricted in this MSC area due to unsupported feature, and it prevents further mobile terminated traffic. In this case the MS is not reachable.

When entering an AoCC supporting area the AoCC related roaming restriction shall be removed in the HLR.

When AoCC is withdrawn the AoCC related roaming restriction shall be removed in the HLR and VLR. This is independent from roaming restrictions due to other reasons.

Title:

Creator: SDT Print version

CreationDate: 1994_03_08

Figure 2.1: SDL diagram of advice of charge (charging) in the MSC

Title:

Creator: SDT Print version

CreationDate: 1994_10_14

Figure 2.2: SDL diagram of advice of charge (charging) in the mobile equipment



Figure 2.3 (sheet 1 of 2): Information flow for Advice of Charge (Charging)

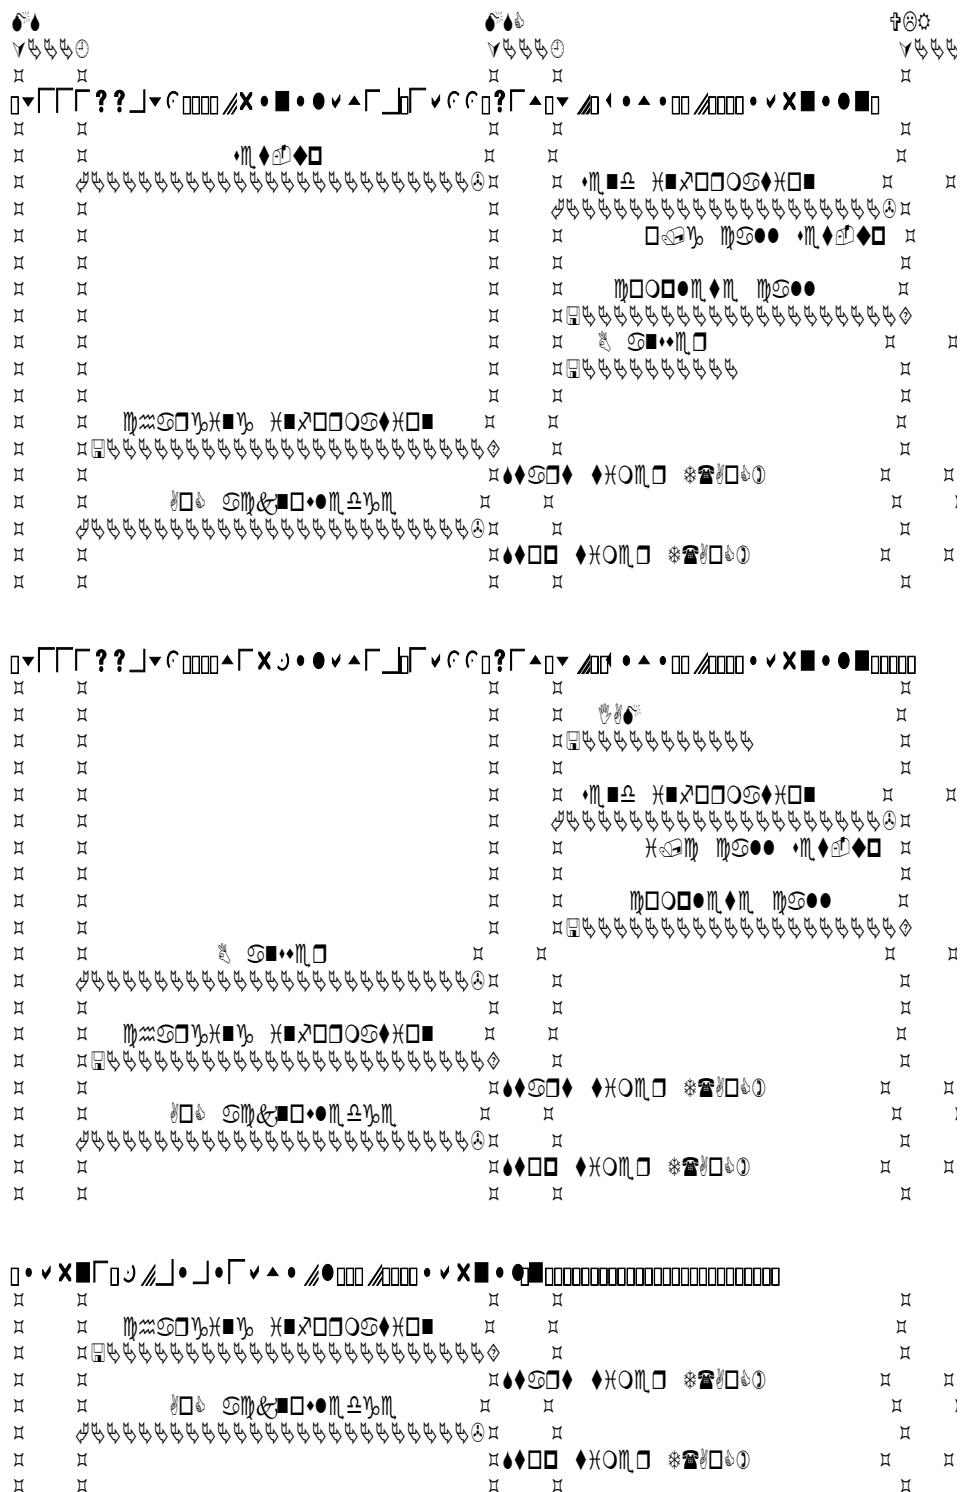


Figure 2.3 (sheet 2 of 2): Information flow for Advice of Charge (Charging)

2.5 Information stored in the HLR

AoCC may have the following logical states (refer to GSM 03.11 for an explanation of the notation):

| Provisioning State | Registration State | Activation State | HLR Induction State |
|--------------------|--------------------|-----------------------|---------------------|
| (Not Provisioned, | Not Applicable, | Not Active, | Not Induced) |
| (Provisioned, | Not Applicable, | Active and Operative, | Not Induced) |

The HLR shall store the logical state of AoCC (which shall be one of the valid states listed above) on a per subscriber basis.

2.6 State transition model

The following figure shows the successful cases of transition between the applicable logic states of AoCC. The state changes are caused by actions of the service provider.

Note that error cases are not shown in the diagram as they normally do not cause a state change. Additionally, some successful requests may not cause a state change. Hence they are not shown in the diagram.

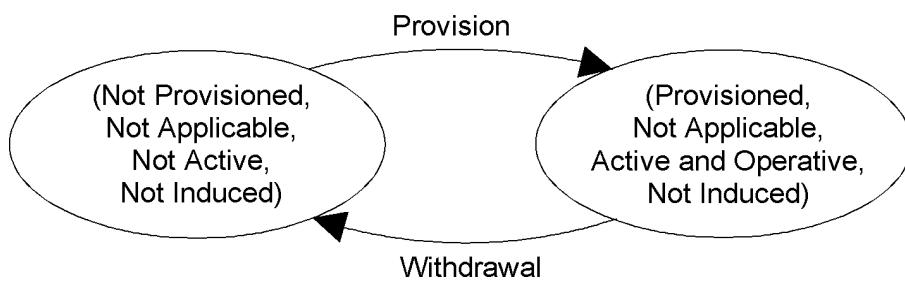


Figure 2.4: State transition model for AoCC

2.7 Transfer of Information from HLR to VLR

If the provisioning state for AoCC is "Provisioned" then when the served subscriber registers on a VLR the HLR shall send that VLR information about the logical state of AoCC.

If the logical state of AoCC is changed while a subscriber is registered on a VLR, then the HLR shall inform the VLR of the new logical state of AoCC.

2.8 Information stored in the VLR

For the supplementary service AoCC the VLR shall store the service state information received from the HLR.

2.9 Handover

Handover will have no impact on AoC control procedure.

Annex A (normative): Information stored in the MSC

The MSC shall have access to the following tables to enable the call handling function to generate the Charge Advice Information (CAI), see GSM 02.24. The table will give the CAI element values corresponding to service request, call destination, type of day and the time of day.

- Units per interval table (e1 values);
- Seconds per internal table (e2 values);
- Scaling factor table (e3 values);
- Unit increment table (e4 values);
- Units per data interval table (e5 values);
- Segments per data interval table (e6 values);
- Initial seconds per time interval table (e7 values).

Annex B (informative): Change Request History

| Status of Technical Specification GSM 03.86 | | |
|-------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Date | Version | Remarks |
| | | No phase 1 version |
| | version 4.0.0 | TS approved by GSM#30 |
| June 1992 | version 4.1.0 | CR 03.86-01 (category C) approved by SMG#03 TS frozen for phase 2 by SMG#05 |
| October 1993 | version 4.2.0 | CR 03.86-02 rev 1 (category C) approved by SMG#08 Reference to National/International pay-phone removed TS changed to draft prETS 300 547 |
| January 1994 | version 4.3.0 | CR 03.86-04 rev 1 (category F) approved by SMG#09 |
| April 1994 | version 4.4.0 | CR 03.86-05 (category F) approved by SMG#10 |
| July 1994 | version 4.5.0 | CR 03.86-06 rev 2 (category F) approved by SMG#11 |
| October 1994 | version 4.6.0 | CR 03.86-08 rev 1 (category F) approved by SMG#12 CR 03.86-09 rev 1 (category F) CR 03.86-10 (category D) TS changed to final draft prETS 300 547 |
| January 1995 | version 4.6.1 | TS changed to ETS 300 547 First edition July 1996 file converted from word5 to word6 |
| December 1996 | version 5.0.0 | GTS converted to draft prETS 300 935 for Release 96 |
| May 1997 | version 5.0.1 | ETS 300 935 first edition |
| SMG#27 | version 6.0.0 | Release 1997 version |
| July 1999 | version 7.0.0 | Specification version 6.0.0 upgrade to Release 1998 version 7.0.0 |
| January 2000 | version 7.0.1 | Version update to 7.0.1 for Publication |
| Text and figures: WinWord 6.0 Stylesheet: etsiw_70.dot | | |

History

| Document history | | | |
|-------------------------|--------------|-----------------------------|------------------------------------|
| V7.0.0 | August 1999 | One step Approval Procedure | OAP 9956: 1999-08-25 to 1999-12-24 |
| V7.0.1 | January 2000 | Publication | |
| | | | |
| | | | |
| | | | |