

# 3GPP TS 32.501 V11.0.0 (2012-09)

---

*Technical Specification*

**3rd Generation Partnership Project;  
Technical Specification Group Services and System Aspects;  
Telecommunication management;  
Self-configuration of network elements;  
Concepts and requirements  
(Release 11)**

---



The present document has been developed within the 3<sup>rd</sup> Generation Partnership Project (3GPP<sup>TM</sup>) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organizational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organizational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP<sup>TM</sup> system should be obtained via the 3GPP Organizational Partners' Publications Offices.

---

Keywords

---

Management, 3GPP

**3GPP**

Postal address

---

3GPP support office address

---

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

---

<http://www.3gpp.org>

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2012, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TTA, TTC).  
All rights reserved.

UMTS™ is a Trade Mark of ETSI registered for the benefit of its members  
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners  
LTE™ is a Trade Mark of ETSI currently being registered for the benefit of its Members and of the 3GPP Organizational Partners  
GSM® and the GSM logo are registered and owned by the GSM Association

# Contents

Foreword .....	5
Introduction .....	5
1 Scope .....	6
2 References.....	6
3 Definitions and abbreviations .....	6
3.1 Definitions .....	6
3.2 Abbreviations.....	6
4 Concepts and background .....	7
4.1 Self-Configuration Concept.....	7
4.1.1 Logical Function Blocs .....	7
4.1.1.1 Address Allocation Function (AAF): .....	7
4.1.1.2 OAM Connectivity Establishment Function (OAM CO_EF):.....	7
4.1.1.3 Software Management Function (SW_MF):.....	7
4.1.1.4 Inventory Update Function (Inv_UF): .....	7
4.1.1.5 Self-Test Function (ST_F): .....	7
4.1.1.6 Self-Configuration Monitoring and Management Function (SC_MMF): .....	7
4.1.1.6.1 Self-Configuration Monitoring and Management Function (SC_MMF_NM): .....	7
4.1.1.6.2 Self-Configuration Monitoring and Management Function (SC_MMF_EM): .....	7
4.1.1.7 Call Processing Link (CPL) Set Up Function (CPL_SUF): .....	7
4.1.1.8 Radio Network Configuration Data Function (R_CD_F):.....	7
4.1.1.9 Transport Network Configuration Data Function (T_CD_F): .....	8
4.1.1.10 NRM IRP Update Function (NRM_UF): .....	8
4.1.1.11 Radio Network and Transport Network Configuration Data Preparation Function.....	8
4.2 Automatic Radio Configuration Data handling Function (ARCF) Concept.....	8
4.2.1 Definitions .....	8
5 Business Level Requirements.....	9
5.1 Self- Configuration of eNodeB's .....	9
5.1.1 Actor roles .....	9
5.1.2 Telecommunications resources.....	9
5.1.3 High-level use cases .....	9
6 Specification level requirements .....	10
6.1 General .....	10
6.2 Actor roles .....	10
6.3 Telecommunications resources .....	10
6.4 Use cases.....	10
6.4.1 Use case for Automatic Radio Network Configuration Data Handling.....	10
6.4.1.1 Use case radio network configuration data request, transfer and validity check .....	10
6.4.2 Use case Self-configuration of a new eNodeB.....	10
6.5 Requirements.....	12
6.5.1 Automatic Radio Network Configuration Data Handling .....	12
6.5.2 Self-configuration of a new eNodeB .....	12
6.5.2.1 Self-Configuration Management and Monitoring .....	12
6.5.2.1.1 Management Part .....	12
6.5.2.1.2 Monitoring Part .....	12
6.5.2.2 Software Management .....	13
6.5.2.3 Address Allocation and OAM Connectivity Establishment .....	13
6.5.2.4 Inventory Update.....	13
6.5.2.5 Self-Test .....	13
6.5.2.6 Radio Configuration Data .....	13
6.5.2.7 Transport Configuration Data.....	14
6.5.2.8 Call Processing Link Set-Up .....	14
6.5.2.9 NRM IRP Update.....	14

7. Functions and Architecture .....15

7.1 Self-Configuration Logical Architecture..... 15

7.2 Self-Configuration Reference Model..... 16

**Annex A (informative): Change history.....17**

---

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

## Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project Technical Specification Group Services and System Aspects, Telecommunication management; as identified below:

- |                |  |
|----------------|--|
| <b>32.501:</b> | <b>Self-Configuration of Network Elements; Concepts and Integration Reference Point (IRP) Requirements</b> |
| 32.502:        | Self-Configuration of Network Elements Integration Reference Point (IRP); Information Service (IS)         |
| 32.506:        | Self-Configuration of Network Elements Integration Reference Point (IRP); Solution Set (SS) definitions    |

---

# 1 Scope

The present document describes the concepts how self-configuration works and what IRP requirements need to be met to support this functionality. The document also captures if a requirement shall be met via the Itf-N interface or via other protocols. This version of the TS is restricted to self-configuration of eNBs. The requirements in this document are not imposed on HNBs.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [3] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [4] 3GPP TR 32.816: "Telecommunication management; Study on Management of Evolved Universal Terrestrial Radio Access Network (E-UTRAN) and Evolved Packet Core (EPC)".
- [5] 3GPP TS 32.531: "Telecommunication management; Architecture; Software Management Concepts and IRP Requirements".

---

# 3 Definitions and abbreviations

For the purposes of the present document, the terms and definitions given in TS 32.101 [2], TS 32.102 [3] and TS 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TS 32.101 [1], TS 32.102 [2] and TS 21.905 [5], in that order.

## 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

**Self Configuration:** The process which brings a network element into service requiring minimal human operator intervention or none at all.

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

SC	Self Configuration
----	--------------------

---

## 4 Concepts and background

Provide here an update of See TS 32.816 [4] §5.1.3.1.1 “Establishment of new eNodeB in network”

### 4.1 Self-Configuration Concept

#### 4.1.1 Logical Function Blocs

##### 4.1.1.1 Address Allocation Function (AAF):

This functional bloc supports the following functions: [SC1], [SC3].

##### 4.1.1.2 OAM Connectivity Establishment Function (OAM CO\_EF):

This functional bloc supports the following functions: [SC2], [SC3], [SC4], [SC5], [SC13].

##### 4.1.1.3 Software Management Function (SW\_MF):

This functional bloc supports the following functions: [SC3], [SC6], [SC7], [SC8], [SC20], [SC21].

##### 4.1.1.4 Inventory Update Function (Inv\_UF):

This functional bloc supports the following functions: [SC16].

##### 4.1.1.5 Self-Test Function (ST\_F):

This functional bloc supports the following functions: [SC17].

This function performs eNodeB self-tests.

##### 4.1.1.6 Self-Configuration Monitoring and Management Function (SC\_MMF):

This functional bloc supports the following functions: [SC18].

This function monitors the self-configuration process and provides the operator with this information. This function must be able to get information about all other functional blocs. In addition to this it allows the operator to control the execution of the self-configuration process.

##### 4.1.1.6.1 Self-Configuration Monitoring and Management Function (SC\_MMF\_NM):

SC\_MMF\_NM (IRP Manager): representing the NM portion of SC\_MMF (necessary monitoring and limited interaction capabilities to support an automated optimization), as well as related IRPManager functionality

##### 4.1.1.6.2 Self-Configuration Monitoring and Management Function (SC\_MMF\_EM):

SC\_MMF\_EM (IRP Agent): representing the portion of SC\_MMF operating below Itf-N, as well as related IRPAgent functionality

##### 4.1.1.7 Call Processing Link (CPL) Set Up Function (CPL\_SUF):

This functional bloc supports the following functions: [SC14], [SC15].

##### 4.1.1.8 Radio Network Configuration Data Function (R\_CD\_F):

This functional bloc supports the following functions: [SC9], [SC11], [SC12].

#### 4.1.1.9 Transport Network Configuration Data Function (T\_CD\_F):

This functional bloc supports the following functions: [SC9], [SC11], [SC12].

#### 4.1.1.10 NRM IRP Update Function (NRM\_UF):

This functional bloc supports the following functions: [SC19].

This function updates the E-UTRAN and EPC NRM IRP with information about the new eNodeB.

#### 4.1.1.11 Radio Network and Transport Network Configuration Data Preparation Function

This functional bloc supports the following functions: [SC10].

## 4.2 Automatic Radio Configuration Data handling Function (ARCF) Concept

### 4.2.1 Definitions

**ARCF Data:** ARCF data are the data which are required for successful activation (of e.g. cell, eNB) that require coordination between several cells and cannot be generated below Itf-N. Some of the ARCF data may be used directly as eNodeB configuration data and some of the ARCF data may be used to generate more other eNodeB configuration data. eNodeB will use the ARCF data together with other configuration data as initial eNodeB radio configuration data. The eNodeB initial radio configuration data will be used for self-configuration.

**ARCF Handling:** This includes ARCF data preparation, ARCF Data Transfer and ARCF Data Validation.

**ARCF Data Preparation:** This makes the ARCF data ready in operator's network management system. How to prepare the ARCF data in operator's network management system is out of scope of this specification.

**ARCF Data Transfer:** This transfers the ARCF data from IRPManager to the IRPAgent,

**ARCF Data Validation:** This validates the syntax and semantics of ARCF data. It takes place in the IRPAgent.



---

## 5 Business Level Requirements

### 5.1 Self- Configuration of eNodeB's

**REQ\_SCMAN\_CON\_1** The actor on NM level shall be able to manage the self-configuration process.

**REQ\_SCMON\_CON\_1** The actor on NM level shall be able to monitor the execution of the self-configuration process.

**REQ\_SCMON\_CON\_2** To support the monitoring of the execution of the self-configuration process, existing capabilities shall be reused as much as possible.

**REQ\_SCSW\_CON\_1** The software download, installation, activation and fallback should be automated as much as possible so that no or only minimal manual intervention is required.

**REQ\_SCSW\_CON\_1** see **REQ\_SW\_CON\_4**

**REQ\_SCSW\_CON\_2** see **REQ\_SW\_CON\_2**

**REQ\_SCOCE\_CON\_1** The OAM connectivity (incl. the IP address allocation) should be established in a fully automated manner.

**REQ\_SCOCE\_CON\_2** The amount of parameters that needs to be preconfigured should be minimized.

**REQ\_SCIU\_CON\_1** Inventory information about the new equipment shall be reported to the actor at NM level as part of the self-configuration process.

**REQ\_SCIU\_CON\_2** Inventory information shall be made available to the IRPManager reusing existing capabilities as much as possible.

**REQ\_SCRCD\_CON\_1** The radio configuration data shall be made available to the eNodeB as part of the self-configuration process.

**REQ\_SCTCD\_CON\_1** The transport configuration data shall be made available to the eNodeB as part of the self-configuration process.

**REQ\_SCCPLSU\_CON\_1** X2- and S1-interfaces shall be set up as part of the self-configuration process, based on the radio configuration, the transport configuration and Neighbour cell Relation information made available to the eNodeB.

Note: If there is no Neighbour cell Relation information provided, then no X2 interface is set up as part of the self-configuration process.

#### 5.1.1 Actor roles

#### 5.1.2 Telecommunications resources

#### 5.1.3 High-level use cases

## 6 Specification level requirements

### 6.1 General

### 6.2 Actor roles

### 6.3 Telecommunications resources

### 6.4 Use cases

#### 6.4.1 Use case for Automatic Radio Network Configuration Data Handling

##### 6.4.1.1 Use case radio network configuration data request, transfer and validity check

Use Case Stage	Evolution / Specification	<<Uses>> Related use
Goal (*)	Transfer the radio network configuration data to the IRPAgent and ensure that it is valid when it is used during self-configuration.	
Actors and Roles (*)	IRPManager as user	
Telecom resources	The E-UTRAN network including its OSS.	
Assumptions	OAM connection is working. IRPAgent cannot determine all radio configuration data on its own.	
Pre conditions	NA	
Begins when	Radio network configuration data is to be made known to the IRPAgent.	
Step 1 (O)	[ARCF-1-1] IRPAgent indicates need for radio configuration data to the IRPManager	
Step 2 (M)	[ARCF-1-2] IRPManager transfers the radio configuration data to IRPAgent or indicates to IRPAgent where the radio configuration data is available and IRPAgent retrieves the data from there	
Step 3 (O)	[ARCF-1-3] IRPManager requests IRPAgent to validate the received radio configuration data	
Step 4 (M)	[ARCF-1-4] IRPAgent validates the received radio configuration data	
Ends when	Ends when all steps identified above are completed or when an exception occurs	
Exceptions	One of the steps identified above fails.	
Post Conditions	The self-configuration process can use the radio configuration data.	
Traceability	FFS	

#### 6.4.2 Use case Self-configuration of a new eNodeB

This use case starts with the first initial self test and ends when the eNodeB is taken into operation.

Use Case Stage	Evolution / Specification	<<Uses>> Related use
Goal (*)	After physical installation, put in an automated manner the eNodeB into a state to be ready to carry traffic.	
Actors and Roles (*)	FFS	
Telecom resources	The E-UTRAN/EPC network including its OSS.	
Assumptions	IP network connectivity exists between the eNodeB and the OAM (sub) systems providing support for the self-configuration process.	
Pre conditions	The eNodeB is physically installed and physically connected to an IP network.	
Begins when	The field personnel start the self-configuration process. It is also possible that the process is triggered automatically after the completion of an eNodeB self-test.	
Step 1 (*) (M O)	<p>The order of the bullet points in the list below does not imply any statements on the order of execution.</p> <p>[SC1] An eNodeB IP address is allocated to the new eNodeB.</p> <p>[SC2] Basic information about the transport network (e. g. gateways) environment is provided to the eNodeB. With this information the eNodeB is able to exchange IP packets with other internet hosts.</p> <p>[SC3] The eNodeB provides information about its type, hardware and other relevant data about itself to the OAM (sub) systems providing support for the self-configuration process.</p> <p>[SC4] The address(es) of the OAM (sub) system(s) providing support for the self-configuration process (e.g. subsystem for software download, subsystem for configuration data download) is provided to the eNodeB. The address is equal to an IP address and a port number, or a DNS name and port number, or an URI.</p> <p>[SC5] The address(es) of the OAM (sub)system(s) providing support for normal OAM functions after completion of the self-configuration process are provided to the eNodeB. The address is equal to an IP address and a port number, or a DNS name and port number, or an URI.</p> <p>[SC6] The eNodeB connects to the OAM system providing support for the software download.</p> <p>[SC7] The decision which software or software packages have to be downloaded to the eNodeB is taken.</p> <p>[SC8] The software is downloaded into the eNodeB.</p> <p>[SC9] The eNodeB connects to the OAM system providing support for the configuration data download.</p> <p>[SC10] The (transport and radio) configuration data for the eNodeB is made available by either preparing it or making prepared configuration data available.</p> <p>[SC11] The (transport and radio) configuration data is downloaded into the eNodeB.</p> <p>[SC12] Dependent nodes (MMEs, eNodeBs) are updated with new configuration data as well (if required).</p> <p>[SC13] The eNodeB connects to the OAM (sub) system(s) providing support for normal OAM functions after completion of the self-configuration process.</p> <p>[SC14] The S1-links are be set up.</p> <p>[SC15] The (planned) X2-links are be set up.</p> <p>[SC16] The inventory system in the OAM is informed that a new eNodeB is in the field.</p> <p>[SC17] The eNodeB performs a self-test. Self-tests of different types can run at different places within the self-configuration procedure.</p> <p>[SC18] The operator is informed about the progress of the self-configuration process and important events occurring during the self-configuration process.</p> <p>[SC19] The network resource models visible over lrf-N are updated during and after the self-configuration process.</p> <p>[SC20] SW is installed, i.e. prepared in such a way, that the NE is ready to use it. For some implementations this step is done not at all or considered part of [SC21] or of [SC8].</p> <p>[SC21] SW is activated, i.e. final provisions are done such that the NE is allowed to use the SW. For some implementations this step is considered part of [SC20] or of [SC8].</p>	
Ends when (*)	Ends when all steps identified above are successfully completed or when an exception occurs.	
Exceptions	FFS.	
Post Conditions	The eNodeB is ready to carry traffic.	
Traceability(*)		

Security aspects are FFS.

## 6.5 Requirements

### 6.5.1 Automatic Radio Network Configuration Data Handling

**REQ-ARCF-FUN-1:** IRPManager shall be able to transfer the ARCF data to IRPAgent or indicate to IRPAgent where the ARCF data is available for downloading.

**REQ-ARCF-FUN-2:** IRPManager should be able to request IRPAgent to validate the previously downloaded ARCF data.

**REQ-ARCF-FUN-3:** IRPAgent shall be able to check the consistency, syntax and semantic of the downloaded ARCF data to ensure that the ARCF data can be implemented in the network.

### 6.5.2 Self-configuration of a new eNodeB

The following requirements apply to the macro eNB only. Requirements for the HNB can be found in TR 32.821.

The way to make any information available to eNB is outside the scope of standardisation.

Conflict resolution in case of contradicting information made aware to the eNodeB is outside the scope of standardisation.

#### 6.5.2.1 Self-Configuration Management and Monitoring

##### 6.5.2.1.1 Management Part

###### **REQ\_SCMAN\_FUN\_1**

It shall be possible for an IRPManager to retrieve

- information regarding how an NE or a group of NEs behaves during self-configuration, i.e. in which sequence the essential steps of self-configuration are executed
- information regarding where the IRPManager can interact with a self-configuration - by suspending the self-configuration process at one or more self-configuration stop points.

Steps, their sequence and their stop point qualification are not imposed by the standard.

###### **REQ\_SCMAN\_FUN\_2**

If choices for stop points to suspend the SWM process are offered, then it shall be possible for an IRPManager to choose/select among them where it will suspend (stop) a self-configuration process (i.e. to ensure fulfillment of pre-conditions for the step like the fulfillment of the presence of required input data for the step).

The IRPManager shall be able to read or select or de-select the stop points offered.

The IRPManager shall be informed about creation and deletion of a profile which is a holder of information regarding the offered self configuration steps, the offered sequence of the steps and the configuration steps stop points.

The IRPManager should be able to change the content of a created profile and be informed about the change.

###### **REQ\_SCMAN\_FUN\_3**

It shall be possible for an IRPManager to resume a suspended self-configuration for one or multiple NEs.

###### **REQ\_SCMAN\_FUN\_4**

It shall be possible for an IRPManager to terminate an currently ongoing self-configuration for one or multiple NEs. After a termination it is not possible to resume the self-configuration.

##### 6.5.2.1.2 Monitoring Part

###### **REQ\_SCMON\_FUN\_1**

The IRPAgent shall send an alarm in case of failures during the self-configuration process.

#### **REQ\_SCMON\_FUN\_2**

The IRPAgent should report the progress of a self-configuration of one or multiple NEs to the IRPManager.

#### **REQ\_SCMON\_FUN\_3**

When a self-configuration profile is created or deleted, then the IRPAgent shall inform the IRPManager about this creation and deletion.

When the optional change of a self-configuration profile is performed, then the IRPAgent shall inform the IRPManager about such a change.

#### **REQ\_SCMON\_FUN\_4**

It shall be possible for IRPManager to retrieve information about the progress of a self-configuration.

#### **REQ\_SCMON\_FUN\_5**

The IRPAgent shall send a notification about the start, stop, completion and optionally cancellation of a self-configuration.

#### **REQ\_SCMON\_FUN\_6**

The IRPAgent shall inform the IRPManager whenever the self-configuration process has been suspended or resumed

### 6.5.2.2 Software Management

**REQ\_SCSW\_FUN\_1** see **REQ\_SWM\_FUN\_1** in 32.531

**REQ\_SCSW\_FUN\_2** see **REQ\_SWM\_FUN\_2** in 32.531

**REQ\_SCSW\_FUN\_3** see **REQ\_SWM\_FUN\_4** in 32.531

**REQ\_SCSW\_FUN\_4** see **REQ\_SWM\_FUN\_5** in 32.531

**REQ\_SCSW\_FUN\_5** see **REQ\_ASWM\_FUN\_1** in 32.531

**REQ\_SCSW\_FUN\_6** see **REQ\_ASWM\_FUN\_2** in 32.531

**REQ\_SCSW\_FUN\_7** see **REQ\_ASWM\_FUN\_3** in 32.531

**REQ\_SCSW\_FUN\_8** see **REQ\_ASWM\_FUN\_4** in 32.531

**REQ\_SCSW\_FUN\_9** see **REQ\_ASWM\_FUN\_5** in 32.531

### 6.5.2.3 Address Allocation and OAM Connectivity Establishment

#### **REQ\_SCOCE\_FUN\_1**

The automatic establishment of the OAM connectivity shall be fully secured.

#### **REQ\_SCOCE\_FUN\_2**

The IRPManager shall be informed that the eNB has reached OAM connectivity.

### 6.5.2.4 Inventory Update

The details of the inventory information to be reported are FFS.

### 6.5.2.5 Self-Test

FFS

### 6.5.2.6 Radio Configuration Data

FFS

6.5.2.7 Transport Configuration Data

**FFS**

6.5.2.8 Call Processing Link Set-Up

**FFS**

6.5.2.9 NRM IRP Update

**REQ\_SCNRMU\_FUN\_1**

The related E-UTRAN NRM IRP and EPC NRM IRP instances shall be created and updated.

---

## 7. Functions and Architecture

### 7.1 Self-Configuration Logical Architecture

The lines between the functional blocks do not indicate specific 3GPP interfaces.

For the abbreviations used, please see the headlines of chapter 4.

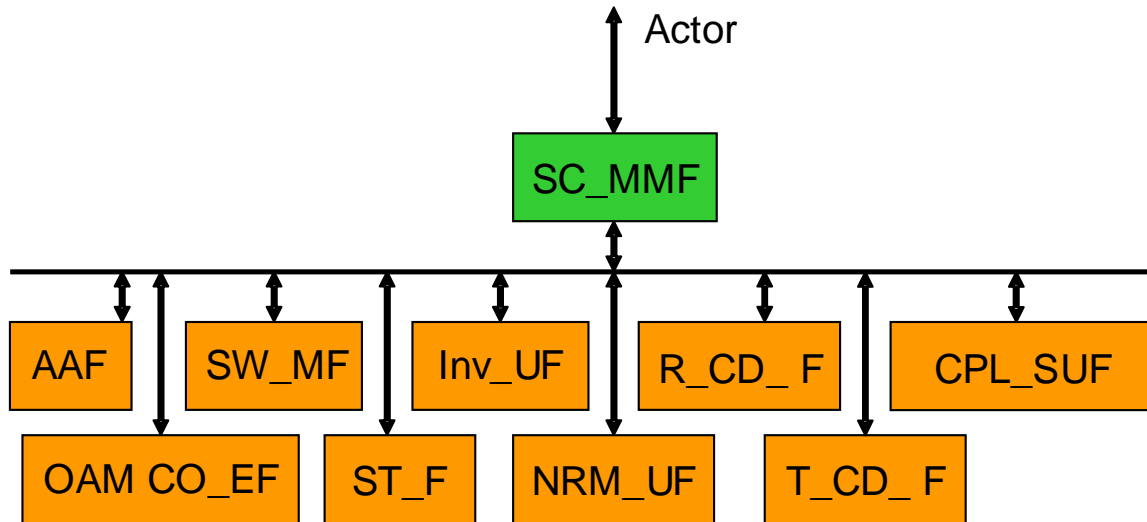


Figure 7.1-1: Self-Configuration Logical Architecture

## 7.2 Self-Configuration Reference Model

The SC\_MMF has a part located in the EM and a part located at the NM.

For the abbreviations used, please refer to Chapter 4.

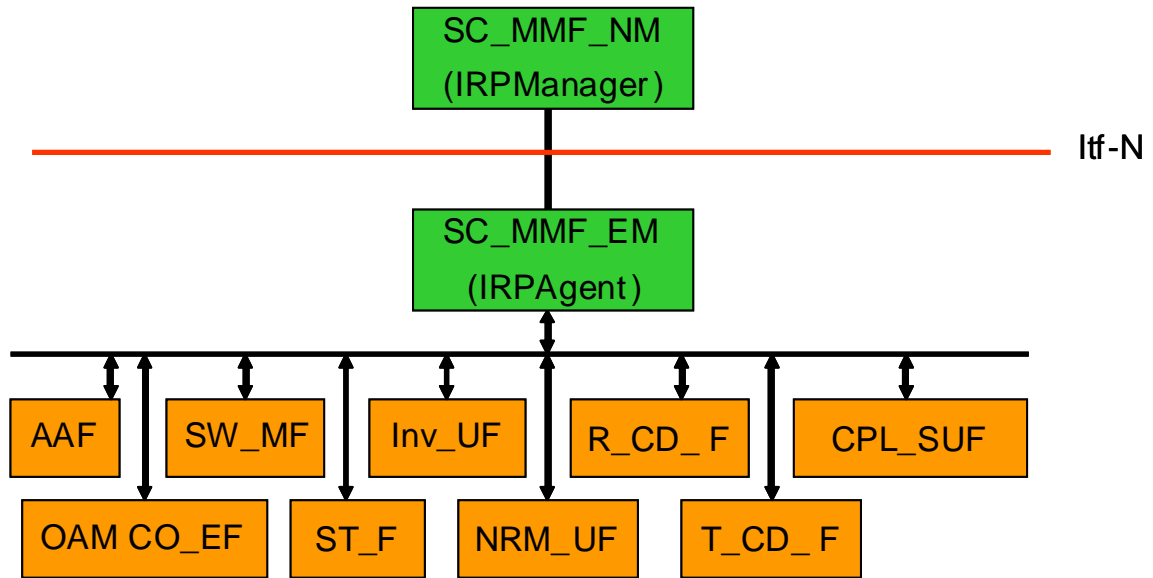


Figure 7.2-1: Self-Configuration Reference Model



---

## Annex A (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2008-12	SP-42	SP-080713	--	--	Submitted to SA#42 information and approval	1.0.0	8.0.0
2009-09	SP-45	SP-090627	001	--	Removal of inconsistency	8.0.0	9.0.0
2010-03	SP-47	SP-100035	002	--	Clarifying Editor's Notes in TS 32.501	9.0.0	9.1.0
2010-03	SP-47	SP-100035	003	--	Introducing ARCF (Automatic Radio Configuration Function)	9.0.0	9.1.0
2011-03	-	-	-	-	Update to Rel-10 version (MCC)	9.1.0	10.0.0
2012-09	SP-57	SP-120645	004	1	Clarification of eNodeB state after self-configuration	10.0.0	11.0.0